


10/049460

JC10 Rec'd PCT/PTO 13 FEB 2002

FORM PTO-1390 (Modified) (REV 5-93)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE		ATTORNEY'S DOCKET NUMBER
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371				016778-0444
INTERNATIONAL APPLICATION NO. PCT/JP00/05398		INTERNATIONAL FILING DATE 08/11/2000	U.S. APPLICATION NO. (if known, see 37 C.F.R. 1.5) Unassigned	
TITLE OF INVENTION RECEPTION LEVEL MEASURING SYSTEM		PRIORITY DATE CLAIMED 08/13/1999		
APPLICANT(S) FOR DO/EO/US Tadashi OGAMI				
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:				
1.	<input checked="" type="checkbox"/>	This is a FIRST submission of items concerning a filing under 35 U.S.C. 371.		
2.	<input type="checkbox"/>	This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371.		
3.	<input type="checkbox"/>	This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).		
	<input checked="" type="checkbox"/>	A proper Demand for International Preliminary Examination was made by the 19 th month from the earliest claimed priority date.		
	<input checked="" type="checkbox"/>	A copy of the International Application as filed (35 U.S.C. 371(c)(2))		
	<input type="checkbox"/>	is transmitted herewith (required only if not transmitted by the International Bureau).		
	<input checked="" type="checkbox"/>	has been transmitted by the International Bureau.		
	<input type="checkbox"/>	is not required, as the application was filed in the United States Receiving Office (RO/US)		
6.	<input checked="" type="checkbox"/>	A translation of the International Application into English (35 U.S.C. 371(c)(2)).		
7.	<input checked="" type="checkbox"/>	Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))		
	<input type="checkbox"/>	are transmitted herewith (required only if not transmitted by the International Bureau).		
	<input type="checkbox"/>	have been transmitted by the International Bureau.		
	<input type="checkbox"/>	have not been made; however, the time limit for making such amendments has NOT expired.		
	<input checked="" type="checkbox"/>	have not been made and will not be made.		
8.	<input type="checkbox"/>	A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).		
9.	<input checked="" type="checkbox"/>	An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).		
10.	<input type="checkbox"/>	A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).		
11.	<input type="checkbox"/>	Applicant claims small entity status under 37 CFR 1.27.		
Items 12. to 17. below concern other document(s) or information included:				
12.	<input type="checkbox"/>	An Information Disclosure Statement under 37 CFR 1.97 and 1.98.		
13.	<input checked="" type="checkbox"/>	An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.		
14.	<input type="checkbox"/>	A FIRST preliminary amendment.		
	<input type="checkbox"/>	A SECOND or SUBSEQUENT preliminary amendment.		
15.	<input type="checkbox"/>	A substitute specification.		
16.	<input type="checkbox"/>	A change of power of attorney and/or address letter.		
17.	<input checked="" type="checkbox"/>	Other items or information: Application Data Sheet; Copy of translation of Amended Claim under PCT Article 34		

U.S. APPLICATION NO. (if known, see 37 C.F.R. 1.50) Unassigned 10/049460		INTERNATIONAL APPLICATION NO. PCT/JP00/05398		ATTORNEY'S DOCKET NUMBER 016778-0444	
18. <input checked="" type="checkbox"/> The following fees are submitted:				CALCULATIONS	
Basic National Fee (37 CFR 1.492(a)(1)-(5): Search Report has been prepared by the EPO or JPO.....\$890.00					
International preliminary examination fee paid to USPTO (37 CFR 1.482).....\$710.00					
No international preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO (37 CFR 1.445(a)(2))\$740.00					
Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO\$1,040.00					
International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4)\$100.00					
ENTER APPROPRIATE BASIC FEE AMOUNT =				\$890.00	
Surcharge of \$130.00 for furnishing the oath or declaration later than 20 Months from the earliest claimed priority date (37 CFR 1.492(e))					
Claims	Number Filed	Included in Basic Fee	Extra Claims	Rate	
Total Claims	6	- 20	= 0	x \$18.00	\$0.00
Independent Claims	3	- 3	= 0	x \$84.00	\$0.00
Multiple dependent claim(s) (if applicable)				\$280.00	
TOTAL OF ABOVE CALCULATIONS =				\$890.00	
Reduction by 1/2 for filing by small entity, if applicable.				\$0.00	
SUBTOTAL =				\$890.00	
Processing fee of \$130.00 for furnishing English translation later the 20 months from the earliest claimed priority date (37 CFR 1.492(f)).				+	
TOTAL NATIONAL FEE =				\$890.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +				\$40.00	
TOTAL FEES ENCLOSED =				\$930.00	
				Amount to be:	
				refunded \$	
				charged \$	
<p>a. <input checked="" type="checkbox"/> A check in the amount of \$930.00 to cover the above fees is enclosed.</p> <p>b. <input type="checkbox"/> Please charge my Deposit Account No. <u>19-0741</u> in the amount of \$0.00 to the above fees. A duplicate copy of this sheet is enclosed.</p> <p>c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. <u>19-0741</u>. A duplicate copy of this sheet is enclosed.</p>					
<p>NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.</p>					
SEND ALL CORRESPONDENCE TO:					
<p>Foley & Lardner Customer Number: 22428</p>  <p>22428</p> <p>PATENT TRADEMARK OFFICE</p>			<p><i>Thomas G. Bilodan</i> SIGNATURE</p> <p><i>Thomas G. Bilodan</i> Reg. No. <i>43438</i> NAME <i>DAVID A. BLUMENTHAL</i></p> <p>REGISTRATION NUMBER 26,257</p>		

DESCRIPTION

RECEPTION LEVEL MEASURING SYSTEM

Technical Field

The present invention relates to a reception level measuring system and, more particularly, to a reception level measuring system in which a base station in a code division multiple access (CDMA) mobile communication system measures the reception level of a signal from a mobile station.

Background Art

In a CDMA mobile communication system, a mobile station shares the same frequency band, and spreads spectra of base band signals in I- and Q-channels by using specific spread codes which are assigned in advance. A base station inversely spreads and extracts the base band signals of the I- and Q-channels by using the specific spread signals which are assigned in advance to the mobile stations. The above-mentioned code division multiple access requires the same reception level of the signals which are received by the base station from the mobile stations so as to enable communication characteristics of the mobile station to be at the same level. Hence, the base station measures the reception levels and notifies the mobile station of the measured reception levels, and the mobile station control a transmission power in accordance with the notification from the base station.

Hereinbelow, a conventional reception level measuring system will be described with reference to Fig. 5. Fig. 5 is a block diagram showing the conventional reception level measuring system. The

conventional reception level measuring system comprises a reception demodulating unit 101 for demodulating a reception signal received by an antenna and outputting a demodulated data stream, and a level measuring unit 102 for obtaining an average of the signal level of the demodulated data stream.

The reception demodulating unit 101 removes a carrier component and a signal component of a spread band from the reception signals which are received by the antenna from mobile station. Next, the reception demodulating unit 101 inversely spreads the signals by using spread signals which are assigned in advance to the mobile station. As a result, the demodulated data stream of the I- and Q-channels from the mobile station is outputted from the reception demodulating unit 101.

The level measuring unit 102 obtains the average signal level of the demodulated data stream (or well-known signals included in the demodulated data stream) at all sampling points for one time slot. The average is outputted as a reception level measured-value from the level measuring unit 102.

In general, the movement of the mobile station changes (fades) the reception level. In this case, the reception level varies due to the Doppler effect depending on the moving speed. A fluctuating frequency (referred to as a Doppler frequency) is increased as the moving speed of the mobile station becomes higher.

However, in the conventional reception level measuring system, since the reception level is always measured at all the sampling points for one time slot and the average is set to be the reception level, irrespective of the Doppler frequency, the reception level measured-value is smaller than the actual value when the increase in Doppler frequency causes a large variation in phase, resulting in a

measurement error.

It is an object of the present invention to provide a reception level measuring system in which the reception level can be measured with high accuracy even if the increase in Doppler frequency causes a large variation in phase.

Disclosure of Invention

According to the present invention, there is provided a reception level measuring system in which a base station in a code division multiple access (CDMA) mobile communication system measures the reception level of a signal from a mobile station, comprising means for approximating signal amplitudes of a demodulated data stream of a reception signal by a line or a curve and for measuring the reception level based on the approximate line or the approximate curve.

Furthermore, according to the present invention, there is provided a reception level measuring system in which a base station in a code division multiple access (CDMA) mobile communication system measures a reception level of a signal from a mobile station, comprising approximate-line estimating means for linearly approximating signal amplitudes of a demodulated data stream in I- and Q-channels from a reception signal in a time interval which is set in accordance with an estimated Doppler frequency, phase-rotation estimating means for estimating the amount of phase rotation based on a gradient of the approximate line, Doppler-frequency estimating means for estimating the estimated Doppler frequency based on the amount of phase rotation, and reception signal power estimating means for estimating a reception signal power based on the approximate line. The reception level measuring system further comprises data delaying means for delaying the demodulated data stream by a time necessary

for the approximate line estimating process by the approximate-line estimating means, and noise-power estimating means for determining the difference between the approximate line and the demodulated data stream delayed by the data delaying means as a noise component and for estimating a noise power. Furthermore, the reception level measuring system further comprises averaging means for subtracting the estimated noise power estimated by the noise-power estimating means from the estimated reception signal power from the reception signal power estimating means, averaging the resultant values, and outputting the average as a reception level measured-value.

According to the present invention, in addition, there is provided a reception level measuring system in which a base station in a code division multiple access (CDMA) mobile communication system measures a reception level of a signal from a mobile station, comprising approximate-curve estimating means for nonlinearly approximating signal amplitudes of a demodulated data stream in I- and Q-channels from a reception signal, phase-rotation estimating means for estimating the amount of phase rotation based on a differential coefficient of the approximate curve, Doppler-frequency estimating means for estimating an estimated Doppler frequency based on the amount of phase rotation, reception signal power estimating means for estimating a reception signal power based on the approximate curve, data delaying means for delaying the demodulated data stream by a time necessary for the approximate curve estimating process by the approximate-curve estimating means, noise-power estimating means for determining that a noise component is the difference between the approximate curve and the demodulated data stream delayed by the data delaying means and for estimating a noise power, and averaging means for subtracting the estimated noise power

from the noise-power estimating means from the reception signal power estimated value which is estimated by the reception signal power estimating means, averaging the resultant values, and outputting the average as a reception level measured-value. The approximate-curve estimating means approximates the signal amplitudes of the demodulated data stream by a curve represented by a polynomial whose order is set in accordance with the estimated Doppler frequency.

Brief Description of the Drawings

Fig. 1 is a block diagram showing a first embodiment of the present invention;

Fig. 2 is a block diagram showing a second embodiment of the present invention;

Fig. 3(a) and Fig. 3(b) are diagrams showing the relationship between the signal amplitude of a demodulated data stream and an approximate line thereof;

Fig. 4 is a diagram showing the relationship between the signal amplitude of a demodulated data stream and an approximate curve thereof; and

Fig. 5 is a block diagram showing the conventional art.

Best Mode for Carrying Out the Invention

Hereinbelow, a first embodiment of the present invention will be described with reference to Fig. 1. Fig. 1 is a block diagram showing the first embodiment of the present invention.

According to the first embodiment, a reception level measuring system comprises reception demodulating means 1 for demodulating a reception signal and outputting a demodulated data stream of I- and Q-channels, approximate-line estimating means 2 for linearly

approximating signal amplitudes of the demodulated data stream in a time interval set in accordance with an estimated Doppler frequency, phase-rotation estimating means 3 for estimating the amount of phase rotation based on the approximate line, Doppler-frequency estimating means 4 for estimating a Doppler frequency based on the estimated amount of phase rotation, data delaying means 5 for delaying the demodulated data stream by time necessary for the process for estimating the approximate line by the approximate-line estimating means 2, reception signal power estimating means 6 for estimating the reception signal power based on the approximate line estimated by the approximate-line estimating means 2, noise-power estimating means 7 for determining the difference in signal amplitude between the approximate line and the demodulated data stream delayed by the data delaying means 5 and estimating a noise power, and averaging means 8 for obtaining the reception level measured-value every time slot based on power values which are estimated by the reception signal power estimating means 6 and the noise-power estimating means 7.

The reception demodulating means 1 removes a carrier component from the reception signal received through an antenna from a mobile station, extracts signal components having a spread band, inversely spreads the extracted signal components by using spread codes which are assigned in advance to the mobile station, and outputs the demodulated data stream in the I- and Q-channels from the mobile stations.

The approximate-line estimating means 2 estimates, as an approximate line, the change in the signal amplitudes, caused by fading, of the demodulated data stream in the I- and Q-channels. In this case, the approximate line is estimated in a time interval set in accordance with the estimated Doppler frequencies, by the well-known method of

least squares.

Fig. 3(a) and Fig. 3(b) are diagrams showing the relationship between the signal amplitude of the demodulated data stream and the approximate line thereof. Then, since the processing of the demodulated data stream in the I-channel is the same as the processing of the demodulated data stream in the Q-channel, only one of the I- and Q-channels (e.g., the I-channel) is shown herein.

Fig. 3(a) shows that there is no fading or only gentle fading. In this status, when it is assumed that a frequency offset is completely removed by AFC (automatic frequency correction), the phase fading can almost be ignored. Hence, the approximate line can be estimated at all sampling points for one time slot.

Fig. 3(b) shows that there is rapid fading. Herein, reference numeral t_0 denotes a time interval for estimating the approximate line which is determined by the estimated Doppler frequency. The approximate-line estimating time interval t_0 is shorter than the length of one time slot and the fading period, and has a predetermined signal amplitude changing ratio and a predetermined phase-fading ratio. Therefore, the approximate line is estimated every time interval t_0 , in order to accurately estimate the approximate line.

The phase-rotation estimating means 3 calculates the amount of phase rotation of the signal amplitudes in the I- and Q-channels based on gradient of the approximate line which is estimated by the approximate-line estimating means 2 every time interval t_0 .

When it is assumed that a symbol m denotes the difference in signal amplitude between a start point and an end point of the approximate line of the demodulated data stream in the I-channel and a symbol n denotes the difference in signal amplitude between a start point and an end point of the approximate line of the demodulated data

stream in the Q-channel, the amount of phase rotation θ at the time interval t_0 is approximated by the following expression (1).

$$\theta = \arctan(n/m) \dots (1)$$

The Doppler-frequency estimating means 4 comprises a Doppler-frequency calculating unit 41 and a memory 42.

The Doppler-frequency calculating unit 41 calculates the amount of rotation per unit time, from the amount of phase rotation θ estimated by the phase-rotation estimating means 3. Incidentally, it is assumed that the calculated value is the current estimated Doppler frequency. The average of the present estimated Doppler frequency and the previous estimated Doppler frequency stored in the memory 42 represents a next estimated Doppler frequency. The previous estimated Doppler frequency stored in the memory 42 is updated with the next estimated Doppler frequency. It is possible to reduce the variation in the estimated values, which is caused by thermal noise and an estimation error of the approximate line, by averaging the previous estimated Doppler frequency and the present estimated Doppler frequency.

The data delaying means 5 delays the demodulated data stream by time necessary for the approximate-line estimating process of the approximate-line estimating means 2. That is, the demodulated data stream, which is synchronized with the output of the approximate-line estimating means 2, is outputted to the noise-power estimating means 7.

The reception signal power estimating means 6 estimates the reception level based on the approximate line estimated by the approximate-line estimating means 2 and the estimated Doppler frequency estimated by the Doppler-frequency estimating means 4. If the estimated Doppler frequency is low (change in level is small), the

reception signal power estimating means 6 obtains the average signal amplitude within the time slot, and estimates the reception signal power. If the estimated Doppler frequency is high (change in level is large), the reception signal power estimating means 6 assumes the approximate line estimated every time interval t_0 to be the present signal amplitude, obtains the average at the sampling points within the time interval t_0 , and estimates the reception signal power.

Since the approximate line estimated by the approximate-line estimating means 2 includes a noise component, the reception level estimated based on the approximate line also includes noise power. Thus, the noise-power estimating means 7 is provided to estimate the noise power.

The noise-power estimating means 7 determines the difference between the approximate line estimated by the approximate-line estimating means 2 and the demodulated data stream delayed by the data delaying means 5 as a noise component, and estimates the noise power based on the estimated Doppler frequency, similarly to the reception signal power estimating means 6.

The averaging means 8 subtracts the noise power level estimated by the noise-power estimating means 7 from the reception signal power level estimated by the reception signal power estimating means 6, and averages the power levels within one time slot. The averaging means 8 outputs the averaged power level as the reception level measured-value with high accuracy.

As mentioned above, the signal levels of the demodulated data stream are linearly approximated in the time interval set based on the estimated Doppler frequency which is varied in accordance with the fading. It is possible to obtain the reception level measured-value with high accuracy by estimating the reception signal power and the noise

power and by measuring the reception level based on the approximate line even if the Doppler frequency is increased and the variation in phase is large.

Next, a second embodiment of the present invention will be described with reference to Fig. 2. Fig. 2 is a block diagram showing the second embodiment of the present invention.

The reception demodulating means 1, the Doppler-frequency estimating means 4, and the data delaying means 5 are designated by the same reference numerals because they are the same as those in Fig. 1.

According to the second embodiment shown in Fig. 2, differently from the first embodiment shown in Fig. 1, (1) the signal amplitudes of the demodulated data stream are approximated not by a line but by a curve, (2) when the approximate curve is estimated, the approximate curve is estimated from all signal values within one time slot, instead of setting the time interval depending on the estimated Doppler frequency, and (3) the amount of phase rotation is calculated based on differential values of the approximate curve. Other features of the second embodiment are similar to those of the first embodiment.

As shown in Fig. 2, according to the second embodiment, the reception level measuring system comprises the reception demodulating means 1 for demodulating a reception signal and outputting a demodulated data stream of I- and Q-channels, approximate-curve estimating means 9 for curvedly approximate signal levels of the demodulated data stream, phase-rotation estimating means 10 for calculating the amount of phase rotation based on a differential coefficient of the approximate curve, the Doppler-frequency estimating means 4 for estimating a Doppler frequency based on the estimated amount of phase rotation, the data delaying means 5 for

delaying the demodulated data stream by time necessary for the approximate curve estimating process by the approximate-curve estimating means 9, reception signal power estimating means 11 for estimating reception signal power based on the approximate curve estimated by the approximate-curve estimating means 10, noise-power estimating means 12 for determining the difference in signal amplitude between the approximate curve and the demodulated data stream delayed by the data delaying means 5 and estimating noise power, and averaging means 13 for obtaining a reception level measured-value per time slot based on the power values estimated by the reception signal power estimating means 11 and the noise-power estimating means 12.

The approximate-curve estimating means 9 comprises a polynomial-degree setting unit 91 for setting a degree N of a polynomial representing the approximate curve in accordance with an estimated Doppler frequency, and a polynomial estimating unit 92 for estimating an N -degree polynomial which approximates signal amplitude levels of the demodulated data stream of the I- and Q-channels, which are outputted from the reception demodulating means 1.

Fig. 4 is a diagram showing the relationship between the signal amplitudes of the demodulated data stream and the approximate curve thereof.

The polynomial-degree setting unit 91 sets the degree N of the N -degree polynomial for approximating the signal amplitudes of the demodulated data stream in accordance with the estimated Doppler frequencies. In the case of no fading or the gentle (static) fading, the degree N is equal to 1. In the case of the rapid (dynamic) fading, the degree N is set to be a higher value ($N \geq 2$) in accordance with the estimated Doppler frequency.

The phase-rotation estimating means 10 calculates the amount of phase rotation based on a maximum value of the differential coefficient of the estimated approximate-curve (N-degree polynomial). When, at a time interval t in the approximate curve, a symbol m denotes the maximum value of the differential coefficient of the I-channel and a symbol n denotes a minimum value of the differential of the Q-channel, the amount of phase rotation θ is approximated by the following expression (2).

$$\theta(t) = \arctan(n/m) \dots (2)$$

A Doppler-frequency calculating unit 41 in the Doppler-frequency estimating means 4 calculates the present Doppler frequency based on the amount of phase rotation obtained by the phase-rotation estimating means 10. Incidentally, it is assumed that a next estimated Doppler frequency is represented by the average of the present Doppler frequency as calculated above and the previous estimated Doppler frequency stored in the memory 42.

The data delaying means 5 outputs the demodulated data stream, which is synchronized with an output of the approximate-curve estimating means 9, to the noise-power estimating means 12.

The reception signal power estimating means 11 assumes the approximate curve estimated by the approximate-curve estimating means 9 to be the present signal amplitude, obtains the average at all sampling points within the time slot, and estimates the reception signal power.

The noise-power estimating means 12 determines that the noise component is the difference between the approximate curve estimated by the approximate-curve estimating means 9 and the demodulated data stream delayed by the data delaying means 5, obtains the average at all sampling points within time slot, and estimates noise

power, similarly to the case of the reception signal power estimating means 11.

The averaging means 13 subtracts a noise power level which is estimated by the noise-power estimating means 12, from the reception signal power level estimated by the reception signal power estimating means 11, and outputs the reception level measured-value per time slot.

As mentioned above, the curve of the signal amplitudes of the demodulated data stream is approximated by a polynomial whose order is set in accordance with the estimated Doppler frequency, estimates the reception signal power and the noise power based on the approximate curve to measures the reception level. Thus, if the Doppler frequency is high and the variation in phases is increased, the reception level can be measured at high accuracy.

Industrial Applicability

According to the present invention, signal amplitudes of a demodulated data stream are linearly approximated in a time interval which is set in accordance with an estimated Doppler frequency that varies depending on fading, and measures a reception level based on the approximate line. As a consequence, if the Doppler frequency is high and the variation in phase is increased, the reception level can be measured with high accuracy.

Furthermore, according to the present invention, a curve of signal levels of the demodulated data stream is approximated by a polynomial whose order is set in accordance with the estimated Doppler frequency, and the reception level is measured based on the approximate curve. As a consequence, if the Doppler frequency is high and the variation in phase is increased, the reception level can be measured with high accuracy.

CLAIMS

1. A reception level measuring system in which a base station in a code division multiple access (CDMA) mobile communication system measures a reception level of a signal from a mobile station, said reception level measuring system comprising

means for approximating signal amplitudes of a demodulated data stream of a reception signal by a line or a curve and for measuring the reception level based on the approximate line or the approximate curve.

2. A reception level measuring system in which a base station in a code division multiple access (CDMA) mobile communication system measures a reception level of a signal from a mobile station, said reception level measuring system comprising:

approximate-line estimating means for linearly approximating signal amplitudes of a demodulated data stream in I- and Q-channels from a reception signal, in a time interval which is set in accordance with an estimated Doppler frequency;

phase-rotation estimating means for estimating the amount of phase rotation based on a gradient of said approximate line;

Doppler-frequency estimating means for estimating said estimated Doppler frequency based on the amount of phase rotation; and

reception signal power estimating means for estimating a reception signal power based on said approximate line.

3. A reception level measuring system according to Claim 2, further comprising:

data delaying means for delaying the demodulated data stream by a time necessary for the approximate line estimating process by said

approximate-line estimating means; and

noise-power estimating means for determining the difference between said approximate line and the demodulated data stream delayed by said data delaying means as a noise component and for estimating noise power.

4. A reception level measuring system according to Claim 3, further comprising:

means for subtracting an estimated noise power estimated by said noise-power estimating means from the estimated reception signal power from said reception signal power estimating means, averaging the resultant values, and outputting the average as a reception level measured-value.

5. A reception level measuring system in which a base station in a code division multiple access (CDMA) mobile communication system measures a reception level of a signal from a mobile station, said reception level measuring system comprising:

approximate-curve estimating means for nonlinearly approximating signal amplitudes of a demodulated data stream in I- and Q-channels from a reception signal;

phase-rotation estimating means for estimating the amount of phase rotation based on a differential coefficient of said approximate curve;

Doppler-frequency estimating means for estimating a estimated Doppler frequency based on the amount of phase rotation;

reception signal power estimating means for estimating a reception signal power based on said approximate curve;

data delaying means for delaying the demodulated data stream by a time necessary for the approximate-curve estimating process of said approximate-curve estimating means;

noise-power estimating means for determining that a noise component is the difference between the approximate curve and the demodulated data stream delayed by said data delaying means and for estimating a noise power; and

means for subtracting the estimated noise power estimated by said noise-power estimating means from the reception signal power from said reception signal power estimating means, averaging the resultant values, and outputting the average as a reception level measured-value.

6. A reception level measuring system according to Claim 5, wherein said approximate-curve estimating means approximates the signal amplitudes of the demodulated data stream by a curve represented by a polynomial whose order is set in accordance with the estimated Doppler frequency.

ABSTRACT

It is an object of the present invention to measure a reception level with high accuracy if a Doppler frequency is increased and the variation in phase becomes large. Approximate-line estimating means 2 linearly approximates signal amplitudes of a demodulated data stream by time interval set in accordance with an estimated Doppler frequency. Phase-rotation estimating means 3 estimates the amount of phase rotation based on the approximate line. Doppler-frequency estimating means 4 estimates a Doppler frequency based on the amount of phase rotation. Data delaying means 5 delays the demodulated data stream by time necessary for the approximate-line estimating process. Reception signal power estimating means 6 estimates reception signal power based on the approximate line. Noise-power estimating means 7 determines the difference in signal amplitude between the demodulated data stream and the approximate line as a noise component, and estimates noise power. Averaging means 8 outputs a measured reception level per time slot based on the estimated power level of the reception signal power estimating means 6 and the noise-power estimating means 7.

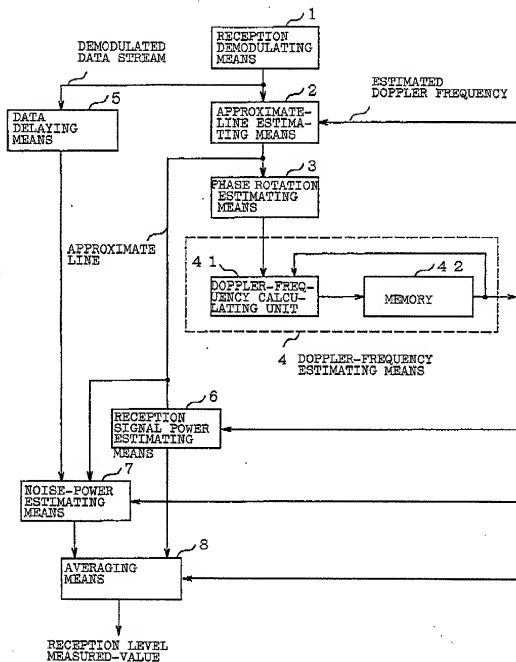


FIG. 1

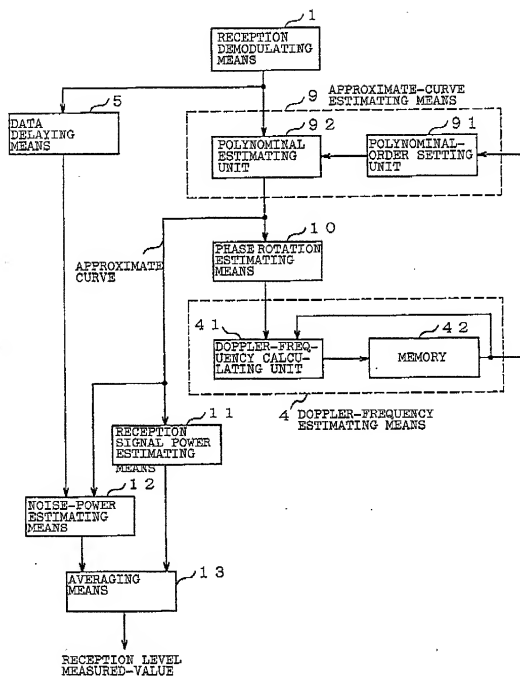


FIG.2

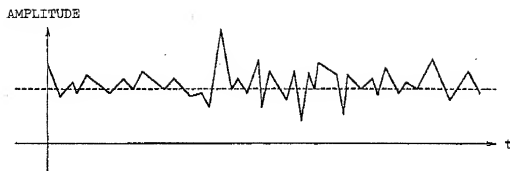


FIG. 3(a)

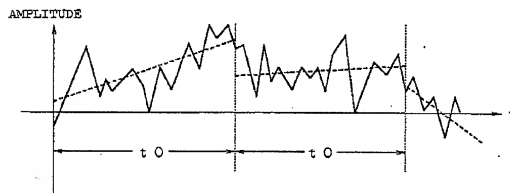


FIG. 3(b)

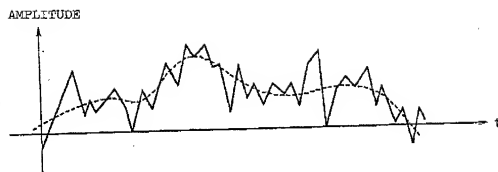


FIG.4




FIG.5

WN-2222(P)
11-229060

Attorney Docket No. _____

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I HEREBY DECLARE:

THAT my residence, post office address, and citizenship are as stated below next to my name;

THAT I believe I am the original, first, and sole inventor (if only one inventor is named below) or an original, first, and joint inventor (if plural inventors are named below or in an attached Declaration) of the subject matter which is claimed and for which a patent is sought on the invention entitled

RECEPTION LEVEL MEASURING SYSTEM

the specification of which (check one)

☐ is attached hereto.☒ was filed on Aug. 11, 2000 as United States Application Number
or PCT International Application Number PCT/JP00/05398 and
was amended on March 16, 2001 (if applicable).

THAT I do not know and do not believe that the same invention was ever known or used by others in the United States of America, or was patented or described in any printed publication in any country, before I (we) invented it;

THAT I do not know and do not believe that the same invention was patented or described in any printed publication in any country, or in public use or on sale in the United States of America, for more than one year prior to the filing date of this United States application;

THAT I do not know and do not believe that the same invention was first patented or made the subject of an inventor's certificate that issued in any country foreign to the United States of America before the filing date of this United States application if the foreign application was filed by me (us), or by my (our) legal representatives or assigns, more than twelve months (six months for design patents) prior to the filing date of this United States application;

THAT I have reviewed and understand the contents of the above-identified specification, including the claim(s), as amended by any amendment specifically referred to above;

THAT I believe that the above-identified specification contains a written description of the invention, and of the manner and process of making and using it, in such full, clear, concise, and exact terms as to enable any person skilled in the art to which it pertains, or with which it is

Attorney Docket No. _____

most nearly connected, to make and use the invention, and sets forth the best mode contemplated by me of carrying out the invention; and

THAT I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I HEREBY CLAIM foreign priority benefits under Title 35, United States Code §119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below any foreign application for patent or inventor's certificate or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number	Country	Foreign Filing Date	Priority Claimed?	Certified Copy Attached?
11-229060	Japan	August 13, 1999	yes	

I HEREBY CLAIM the benefit under Title 35, United States Code § 119(e) of any United States provisional application(s) listed below.

U.S. Provisional Application Number	Filing Date

I HEREBY CLAIM the benefit under Title 35, United States Code, §120 of any United States application(s), or § 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

Attorney Docket No. _____

U.S. Parent Application Number	PCT Parent Application Number	Parent Filing Date	Parent Patent Number

I HEREBY APPOINT the following registered attorneys and agents of the law firm of FOLEY & LARDNER to have full power to prosecute this application and any continuations, divisions, reissues, and reexaminations thereof, to receive the patent, and to transact all business in the United States Patent and Trademark Office connected therewith:

STEPHEN A. BENT	Reg. No. 29,768
DAVID A. BLUMENTHAL	Reg. No. 26,257
BETH A. BURROUS	Reg. No. 35,087
ALAN I. CANTOR	Reg. No. 28,163
WILLIAM T. ELLIS	Reg. No. 26,874
JOHN J. FELDHAUS	Reg. No. 28,822
PATRICIA D. GRANADOS	Reg. No. 33,683
JOHN P. ISACSON	Reg. No. 33,715
MICHAEL D. KAMINSKI	Reg. No. 32,904
LYLE K. KIMMS	Reg. No. 34,079
KENNETH E. KROSIN	Reg. No. 25,735
JOHNNY A. KUMAR	Reg. No. 34,649
GLENN LAW	Reg. No. 24,371
PETER G. MACK	Reg. No. 26,001
BRIAN J. MCNAMARA	Reg. No. 32,789
SYBIL MELOY	Reg. No. 22,749
RICHARD C. PEET	Reg. No. 35,792
GEORGE E. QUILLIN	Reg. No. 32,782
COLIN G. SANDERCOCK	Reg. No. 31,298
BERNHARD D. SAXE	Reg. No. 28,665
CHARLES F. SCHILL	Reg. No. 27,590
RICHARD L. SCHWAAB	Reg. No. 25,479
ARTHUR SCHWARTZ	Reg. No. 22,115
HAROLD C. WEGNER	Reg. No. 25,258

and I request that all correspondence be directed to:

David A. Blumenthal
FOLEY & LARDNER
3000 K Street, N.W., Suite 500
Washington, D.C. 20007-5109

Telephone: 202-672-5407
 Facsimile: 202-672-5399

I UNDERSTAND AND AGREE THAT the foregoing attorneys and agents appointed by me to prosecute this application do not personally represent me or my legal interests, but instead represent the interests of the legal owner(s) of the invention described in this application.

Attorney Docket No. _____

I FURTHER DECLARE THAT all statements made herein of my own knowledge are true, and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

100

Name of first inventor	TADASHI OGAMI
Residence	Tokyo, Japan JPX
Citizenship	Japanese
Post Office Address	c/o NEC Corporation, 7-1, Shiba 5-chome, Minato-ku, Tokyo, Japan
Inventor's signature	Tadashi Ogami (Signature)
Date	February 8, 2002
Name of second inventor	
Residence	
Citizenship	
Post Office Address	
Inventor's signature	
Date	
Name of third inventor	
Residence	
Citizenship	
Post Office Address	
Inventor's signature	
Date	